


TECHNICAL CHARACTERISTICS

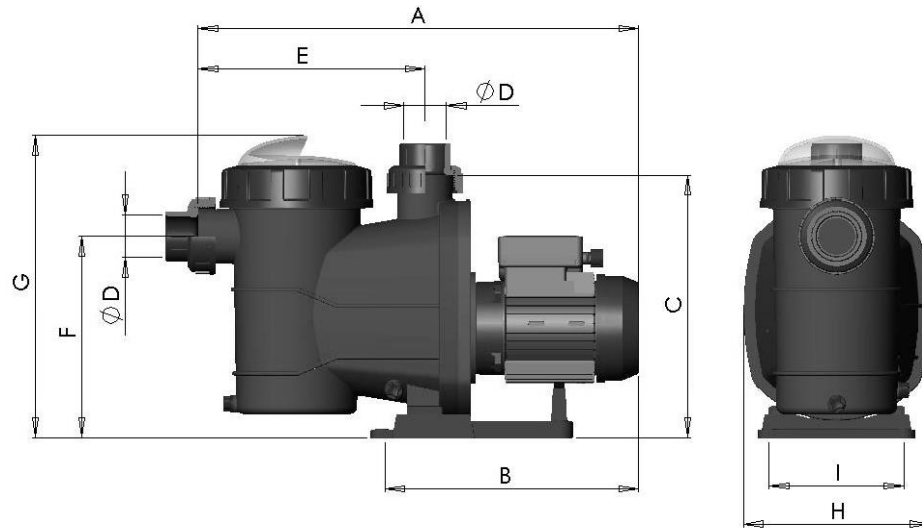

COD.	Cv	A	B	C	E	F	G	H	I	D
15238	1/2 II	544	320	327	283	252	370	232	168	50
15239	1/2 III	544	320	327	283	252	370	232	168	50
15240	3/4 II	544	320	327	283	252	370	232	168	50
15241	3/4 III	544	320	327	283	252	370	232	168	50
15242	1 II	544	320	327	283	252	370	232	168	50
15243	1 III	544	320	327	283	252	370	232	168	50
15244	1 1/2 II	564	340	327	283	252	370	232	168	63
15245	1 1/2 III	564	340	327	283	252	370	232	168	63
15246	2 II	564	340	327	283	252	370	232	168	63
15247	2 III	564	340	327	283	252	370	232	168	63
15248	3 III	608	384	327	283	252	370	232	168	63

Cod. 15238-0012 Rev. 0

• WE RESERVE THE RIGHT TO CHANGE ALL OR PART OF THE FEATURES OF THE ARTICLES OR CONTENTS OF THIS DOCUMENT, WITHOUT PRIOR NOTICE.

SELF-PRIMING PUMP FOR SWIMMING POOLS



GLASS PLUS MANUAL
MANUEL GLASS PLUS

Made in
EC

CE

TUV GS
PRODUCT SERVICE

ASTRALPOOL 

GLASS PLUS



C/ Passeig de Santlehy, 25
08213 POLINYÀ – BARCELONA (SPAIN)
Telf. +34 93 713 18 55 - Fax. +34 93 713 41 44



EVIDENCE OF CONFORMITY

- Declares under their own responsibility that all the pumps: **ASTRAL GLASS PLUS, Single-phase and Three-phase**.
Manufactured since 01/10/2004, independent of the serial number, are in compliance with:

- 89/392/CEE Machine Directive Safety prescriptions, modified by the 91/368/CEE.
- 89/336/CEE Electromagnetic compatibility Directive, modified by the 91/263 CEE, 92/31/CEE Directive
- 73/23/CEE, Low voltage Directive, modified by the 93/68/CEE Directive.
- 2000/14/EC Noise emission Directive.
- EN 60335-2-41/A1:2004.

ENGLISH

ASTRAL GLASS PLUS PUMP SPECIFICATIONS

PRODUCT AND ACCESSORY DESCRIPTION

The pump body is built from state of the art thermoplastics. The pumps are of a self-suction type from 0,5 CV to 3 CV and are provided with both single-phase and three-phase motors. A pre-filter has been incorporated into the pump body to prevent the foreign bodies entering and damaging the pump's hydraulic parts.

The motors supplied with the motor pump unit have been protected by IP-55 and are prepared to withstand hot atmospheres and high humidity levels. The motors are also provided with a heat protector that avoids damage to the pump due to excess current.